
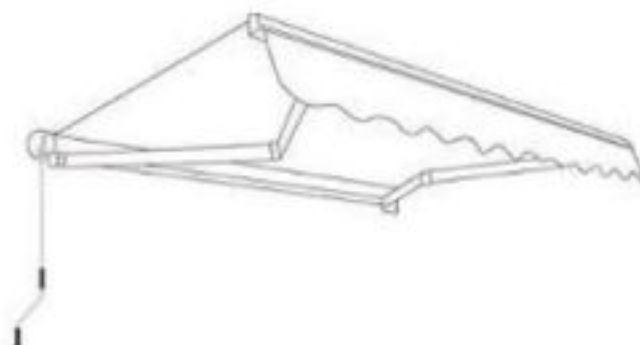


**Control Options:**


● **Manual** (standard)

Manual by gear box and crank handle;

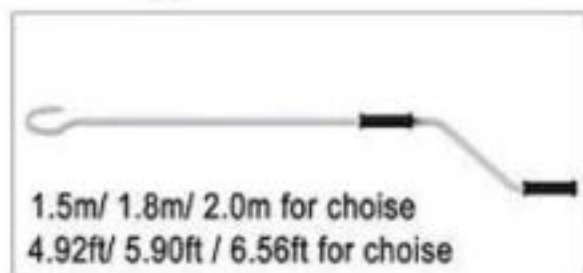



● **Motorized** Voltage: AC220V~240V, AC110V

- ◆ Standard: Motorized by a single switch;
  - ◆ Plus: Motorized by remote control (Receiver box + Emitter);
  - ◆ Deluxe: Both remote control + manual control + switch control
- Any motorized mode can plus automatic Wind/Light/Rain Sensor.

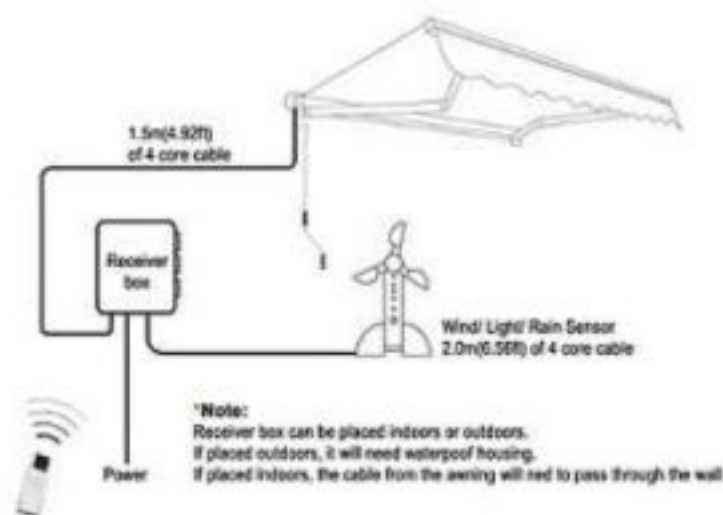


● **Fabric**



- ◆ Polyester: 280g/sqm polyester with PU coating, UV resistance and waterproof.
- ◆ Acrylic: 320g/sqm acrylic with PU coating, UV resistance and waterproof.

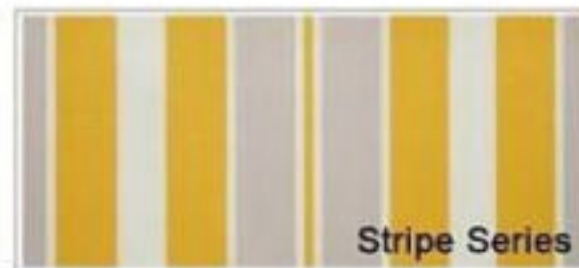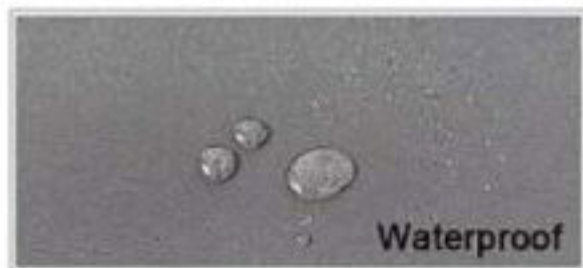

**Installation:**

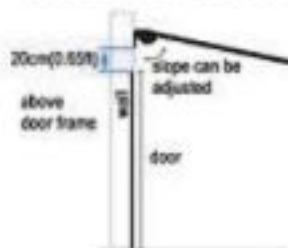

The recommended slope is factory pre-set. This can be adjusted with a spanner any time after fitting: from almost horizontal to approx 30 degrees below the horizontal. Using laser, spirit level or other method, mark an accurate horizontal line at the required height. Fixing must be directly into brick or concrete. Mortar joints between the bricks or blocks will not be secure enough to bolt into.

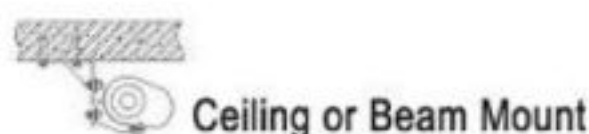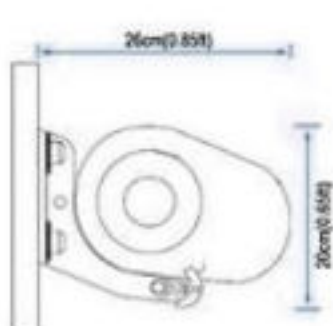

Our awnings are designed to attach to the wall and are supplied with two or three brackets (depending on the size of the awning you order) and expandable fixing bolts. The awnings are easy to fit and come with full fitting instructions. With the correct tools they should not take more than two hours to fit.